


--	--	--	--	--



Pin Assignment

P1	P2	Color
A1&B1&A12&B12	A1&B1&A12&B1	Black
B11	B11	Blue
B10	B10	Black
A5	A5	Blue
B8	B8	Purple
B5	B5	Orange
B3	B3	Purple
B2	B2	Yellow
A4&B4&A9&B9	A4&B4&A9&B9	Red
A11	A11	Red
A10	A10	White
A8	A8	Yellow
A7	A7	White
A6	A6	Green
A3	A3	Yellow
A2	A2	Brown

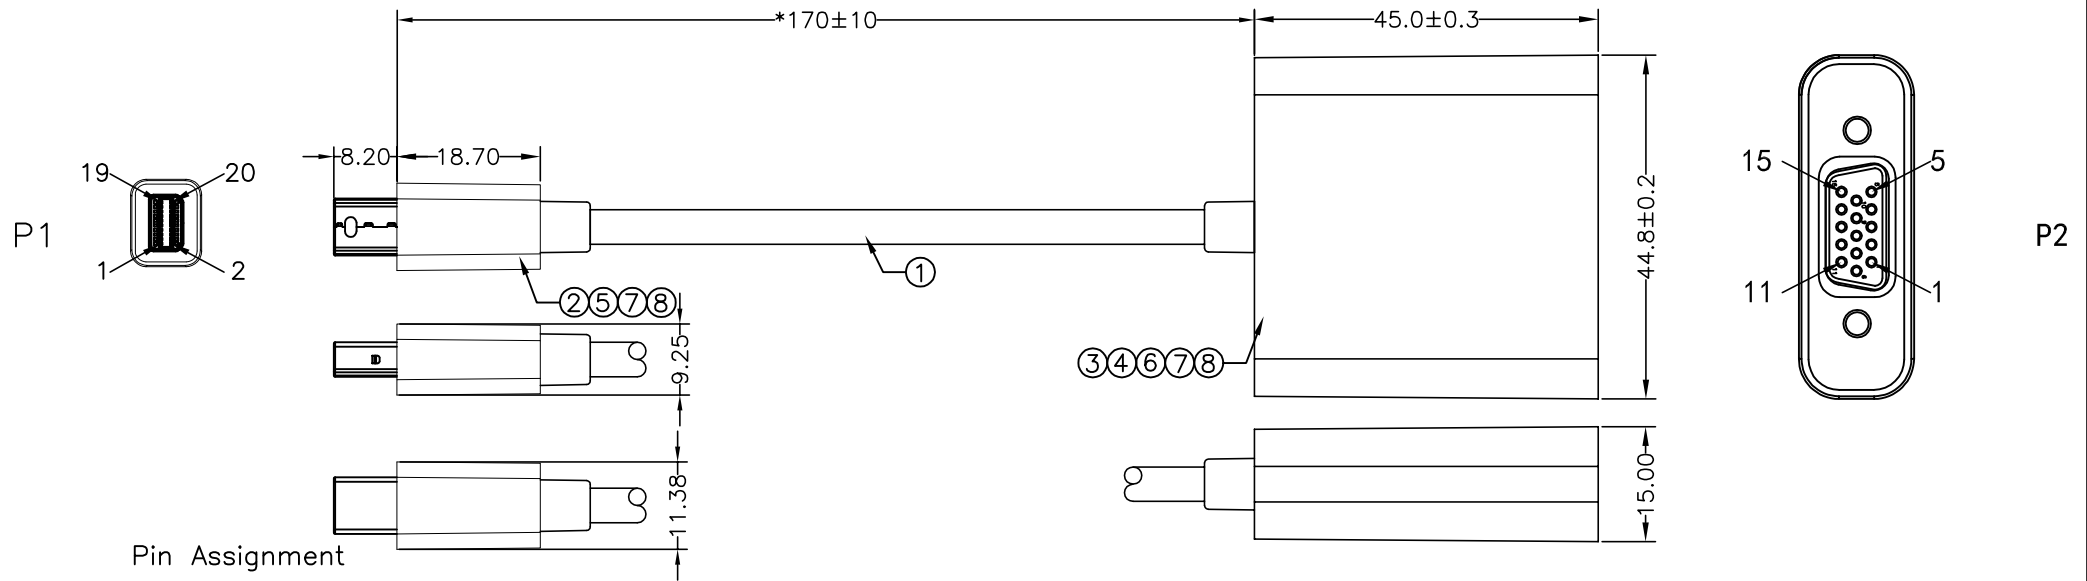

8	Overmold	Polyvinyl Chloride 45P White	18
7	Innermold	Low density transparent PE adhesive	10
6	AL Shell	VGA Shell:52*23.5*10.9mm	1
5	AL Shell	Type-C Shell:22*10.9*5.9mm	1
4	Baffle	VGA Cover:ABS White 22.2*9.7*13.6mm	1
3	PCBA	VGA PCBA:36.5*26.5*1.6mm 4L,CONN VGA,Au-Plated,Insulation PBT White.	1
2	Conn	USB 3.1 C Type,Insulation PBT White,Contact Pin G/F,Shell Ni-Plated,With Capacitance	1
1	Cable	USB3.1 Cable(32AWG*1P+AL)*5+30AWG*3C+30AWG*1C+24AWG*1C+D+AL PVC Jacket Black OD:4.6±0.1mm NO Mark	0.18
NO	Name	Description	Quantity

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MM
TOLERANCE
DECIMALS ANGULAR
.XX ±0.1 ±5°
.XXX ±0.05 ±5°
DO NOT SCALE DRAWING

Product name Mini DP/M to VGA/F L=170mm			
133432		DA235	
MM			
E1705010		X0	1/1